



- 1 Install steel studs spacing not more than 60 cm. apart.

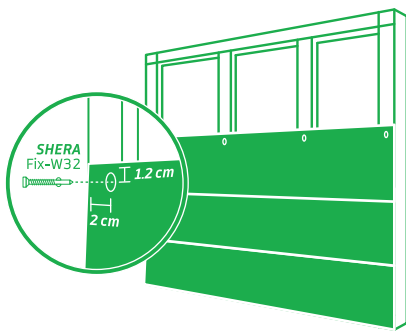


- 2 Fasten colored SHERA Plank to the steel studs with one on top of the other, from bottom of the wall to the top.

Recommended overlapping length is 2.5 cm and place the first plank with ground clearance of 2-5 cm to avoid direct contact with damp or water.




- 3 Caulk at all end joints and the corners of wall. Clean up the plank after installed.

## Handling & storage



SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.



SHERA products should be stacked on dry and leveled ground.

It is recommended to store SHERA under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.



During a transfer, SHERA products should be handled at 50 cm. from both ends.

The product should be lifted such that its side is parallel to the floor.

Avoid installing SHERA product under wet condition to reduce chance of cracking.