



- 1 For vertical fences, install steel studs spacing not more than 60 cm apart and span length should not be more than 300 cm.

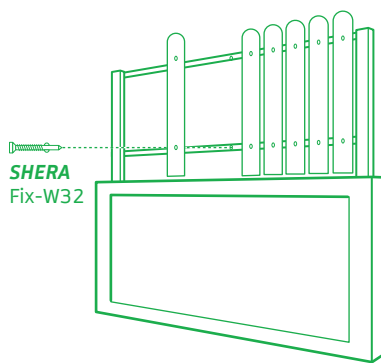

- 2 Prime uncolored *SHERA* Fence prior to installation.
- 3 Fasten *SHERA* Fence to steel studs with screw at the middle from long-side edges, every 50 cm.

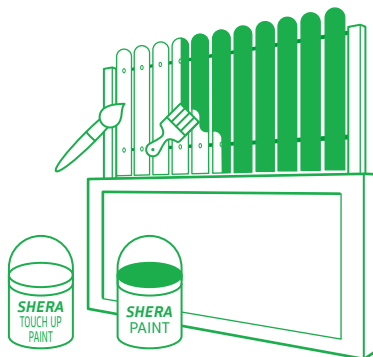


- 4 Caulk at all end joints and over the screw heads.

For uncolored *SHERA* Fence  
Clean up before painting.


For colored *SHERA* Fence  
Touch up the screw head after installed.

## Handling & storage



*SHERA* products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.



*SHERA* products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.



During a transfer, *SHERA* products should be handled at 50 cm from both ends.

The product should be lifted such that its side is parallel to the floor.

Avoid installing *SHERA* product under wet condition to reduce chance of cracking.